
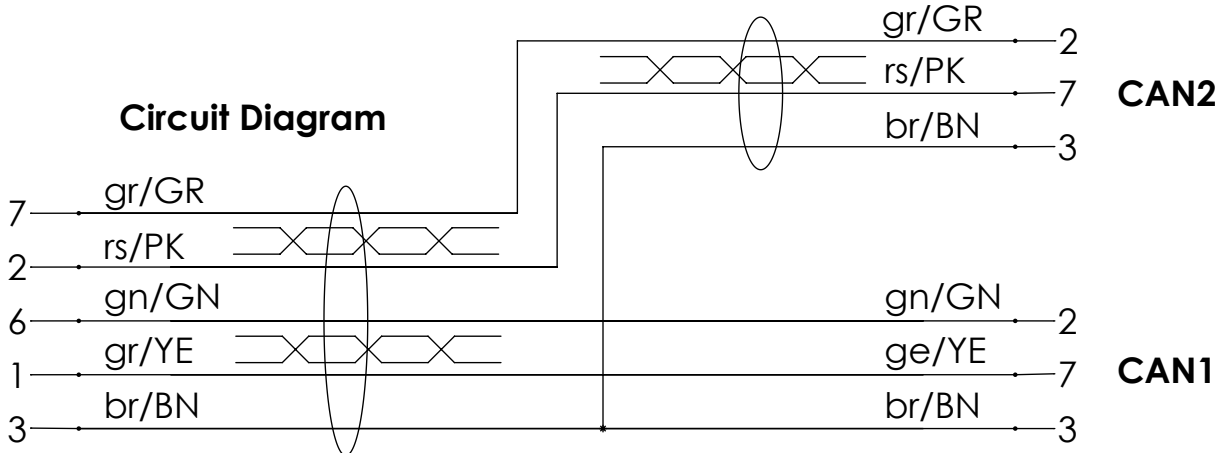




Rev.	Description	Date	Sign
1.0.0		2020-02-20	
1.0.1		2020-02-27	

Pos.	Qty.	Description
1	1	D-Sub insert 15-pol. HD female
2	2	D-sub insert 9-pol. male
3	1	D-sub metal cover, size 1. Double cable exit, ex Tyco 1534805-1
4	1	D-sub metal cover, size 1. Single cable exit, ex FCT FMK1 45°
5	1	D-sub metal cover, size 1. Single cable center exit, ex FCT FMK1G
6	170cm	Data cable 3x2x0,14 flexible lappcable LiYCY (TP) twisted, grey
7	3	Label, shrink tube
8	4	Shrink tube
9	1	individual packaging in ESD-compliant bag

Shields connected to metal housings.  
 Cable ends protected by heat shrink tube or spout.  
 Contact durability > 500 cycles

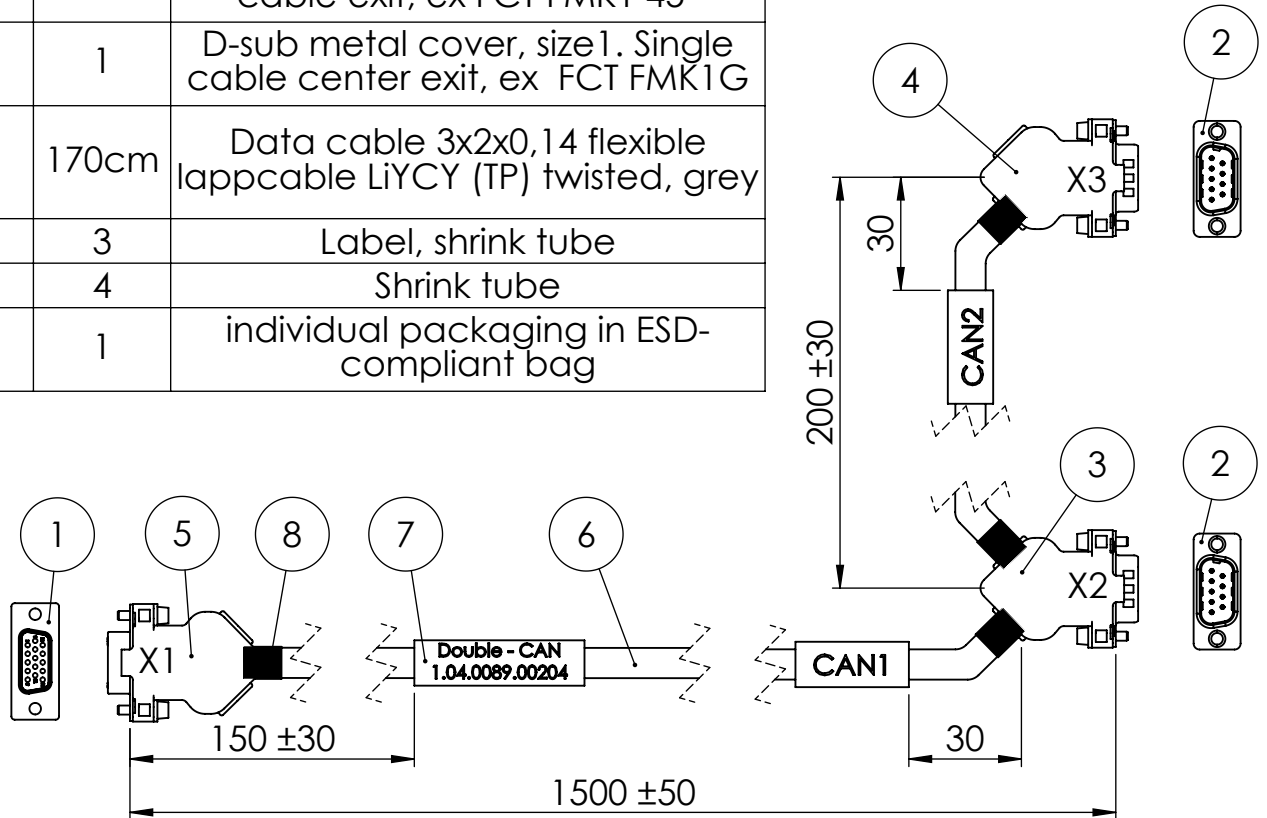

Colors due to DIN 47100 and IEC60757

Owner <b>HMS Industrial Networks AB</b> Stationsgatan 37 S-302 45 Halmstad Tel: +46 (0)35 - 17 29 00 Fax: +46 (0)35 - 17 29 09 	 Scale 1:2	Size	Weight	Finishing
	Title IXXAT HD15 Double CAN Cable			
Sign: RiA	Date: 2020-02-18	Rev. 1.0.1	Sheet: 1 of 1	Document nr SDH-8913-004-M0
			HMS nr 1.04.0089.00204	